



TimberTech2 Acoustic Plus

Underlay

Heavyweight natural rubber underlay with **outstanding noise reduction.**

- The sound of silence...**
 TimberTech2 Acoustic Plus has an exceptional impact sound insulation level of 27dB - really bringing down noise levels in the room and making it a better place to be.
- Protects against moisture**
 The gold vapour barrier stops your floor covering being damaged by moisture rising up from the sub-floor.
- Heavyweight champ**
 The heavy mass stability of TimberTech2 Acoustic Plus means your floor's always fully supported, reducing the wear and tear to it, whatever a pounding it takes!

Technical Data

Properties	Unit	Value	Method
Density	kg/m ³	750 ± 50	internal
Weight per square metre	kg/m ²	3.7 ± 0.37	internal
Impact Sound Reduction	dB	≥ 27	BS EN ISO 717-2:2013
Thermal Conductivity measured at 10°C	W/m k	0.036	DIN 4108
Thermal Resistance	m ² k/W	0.08-0.16	DIN 4108
Maximum Compression Load	kN/m ²	2-5	DIN EN 1606

The information given above may vary and is partly based on information from our suppliers. It represents the prevailing level of expertise and is not binding in a legal sense. The compliance of legal requirements lies within the customers own responsibility.

QA Flooring Solutions Ltd

Block H, Pickerings Road,
 Widnes, Cheshire WA8 8XW
 Tel: 0151 495 3434
 Fax: 0151 420 9062
 Email: sales@qaflooringsolutions.com
www.qaflooringsolutions.com


Simply Better

Heavy
Traffic

Wood



Best for

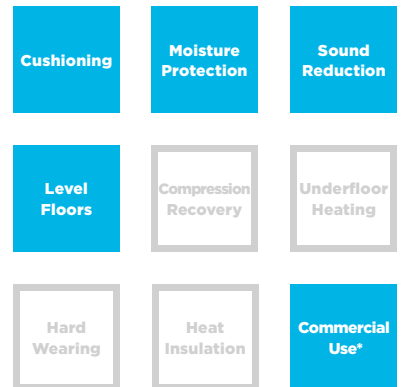

*Suitable for hotels and public buildings

Available in

Code	QAU-TTA-02
Size	1m x 8m (8m ²)
Thickness	5mm