

QA Barrier Underlay

Lightweight PE foam wood underlay with vapour barrier

- Protects against damp**
 With a clear printed vapour barrier on one side, Barrier effectively and economically stops moisture rising from the subfloor to keep your floor dry.
- Support against impact shock**
 Barrier gives your floor covering the perfect level of support, guarding against excess wear and even high impact damage. It feels good under your feet, too.
- Light fantastic**
 While it's no lightweight in performance, Barrier's certainly easier and safer to lift and handle compared with many underlays – thanks to its ultra-lightweight PE foam.

Technical Data

Properties	Unit	Value Test	Method
Density	kg/m ³	20 ± 2.0	internal
Impact Sound Reduction	dB	≥ 20	DIN EN 717-2
Temperature Stability (unloaded)	°C	75	internal
Thermal Conductivity of PE Foam measured at 10°C	W/m k	0.045	DIN 4108
Thermal Resistance of PE Foam	m ² k/W	0.067	DIN 4108
Vapour Diffusion Resistance	m	≥ 40	DIN EN ISO 12572
Maximum Compression Load	kN/m ²	≤ 2.0	DIN EN 1606
Resistance to Compression at 25% Deformation	to/m ²	≥ 2.5	DIN 53 577
Tensile Strength, lengthwise*	N/mm ²	≥ 0.30	DIN 53 571
Tensile Strength, crosswise*	N/mm ²	≥ 0.15	DIN 53 571
Elongation at break, lengthwise*	%	≥ 100	DIN 53 571
Elongation at break, crosswise*	%	≥ 80	DIN 53 571

The information given above may vary and is partly based on information from our suppliers. It represents the prevailing level of expertise and is not binding in a legal sense. The compliance of legal requirements lies within the customers own responsibility.



Tel: 01484 411 885

Email: enquiries@flooringwarehousedirect.co.uk

www.flooringwarehousedirect.co.uk


Simply Better

Medium Traffic

Wood



Best for

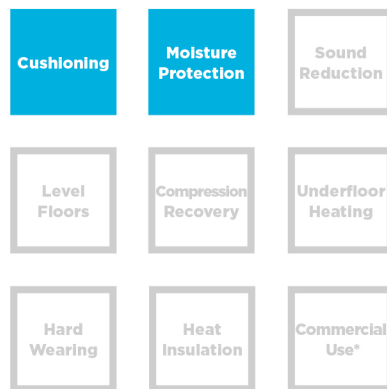

*Suitable for hotels and public buildings

Available in

Code QAU-BAR-01

Size 1m x 15m (15m²)

Thickness 3mm